


REPLACEMENT OF TERMINATION CAP WITH THE MTOCRK (4"/7") OR THE PTOCRK (5"/8")



If your old termination is rusted and beyond repair, you can replace the top portion with a MTOCRK/PTOCRK.

These are half stainless steel terminations that replace the half termination on the existing one.

The following will be the instructions on how to replace the half terminations.

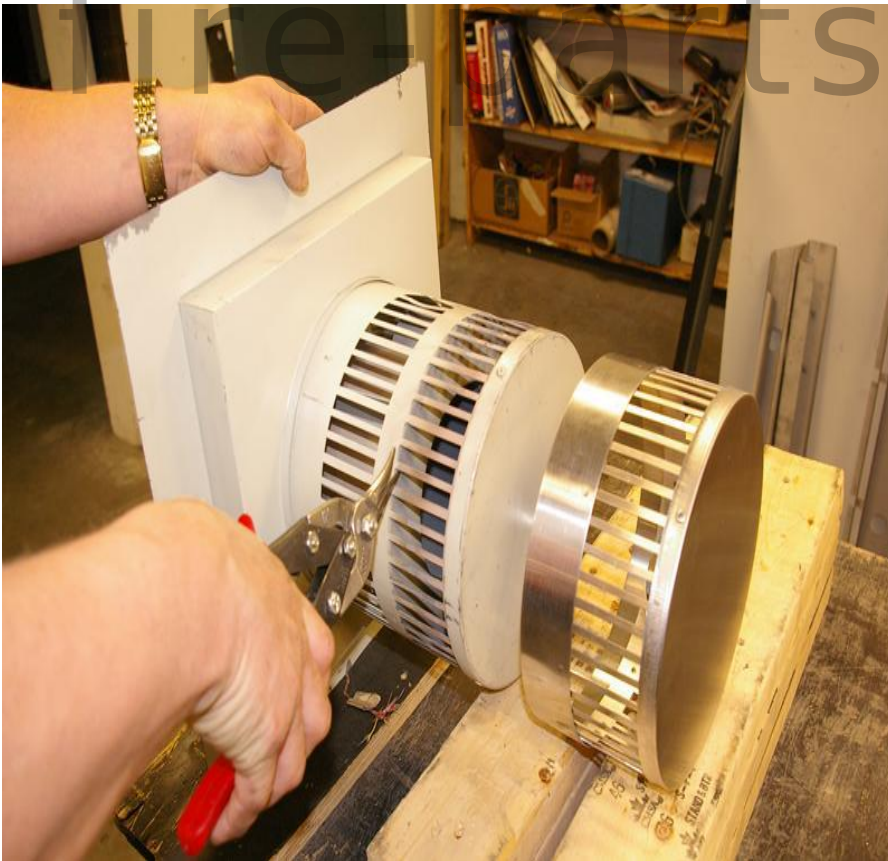

First, take a pair of right hand tin snips and cut the single pieces of metal that connect to the top of the termination.



fire-parts.com



After removing the top half of the old termination, hammer down the end pieces of metal that may be protruding from the termination. This will allow for a nice neat finish.



fire-parts.com



Take the top half of the new stainless steel termination and slide it over the body of the old termination to the halfway point of the old termination. Once the new half stainless steel termination is in place screw down with three tec (1/4") screws.